


OWNER'S MANUAL

Ceiling And Floor Type

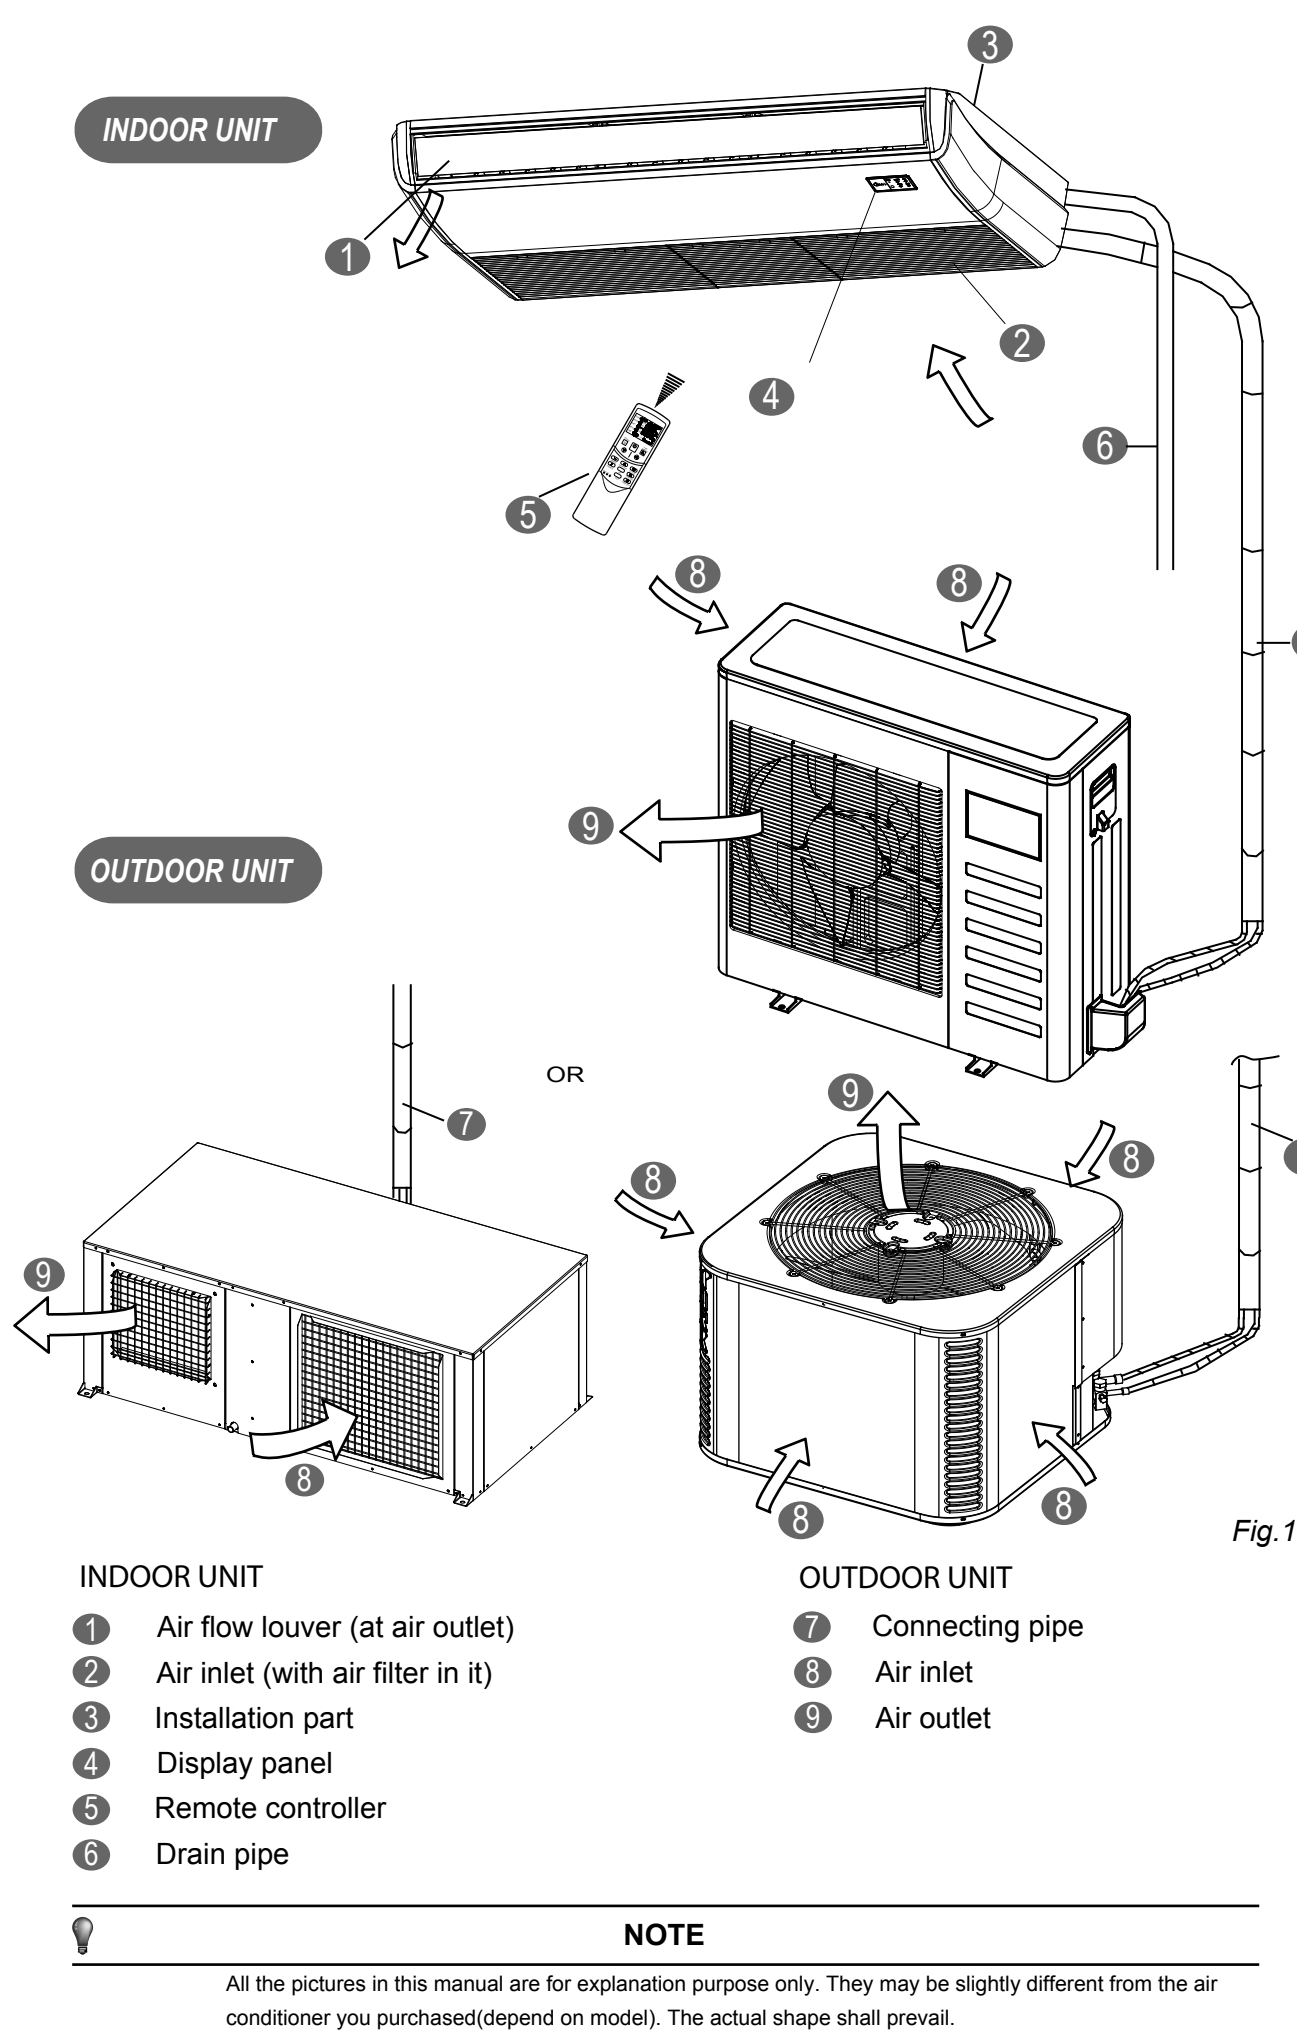

- INDOOR UNIT**
- 1 Air flow louver (at air outlet)
 - 2 Air inlet (with air filter in it)
 - 3 Installation part
 - 4 Display panel
 - 5 Remote controller
 - 6 Drain pipe

- OUTDOOR UNIT**
- 7 Connecting pipe
 - 8 Air inlet
 - 9 Air outlet

NOTE

All the pictures in this manual are for explanation purpose only. They may be slightly different from the air conditioner you purchased (depend on model). The actual shape shall prevail.

CONTENTS	PAGE
IMPORTANT SAFETY INFORMATION.....	1
TEMPORARY OPERATIONS.....	2
AIR CONDITIONER OPERATIONS AND PERFORMANCE.....	3
HINTS FOR ECONOMICAL OPERATION.....	4
ADJUSTING AIR FLOW DIRECTION.....	5
MAINTENANCE.....	6
FOLLOWING SYMPTOMS ARE NOT AIR CONDITIONER TROUBLES.....	7
TROUBLESHOOTING.....	8

1. IMPORTANT SAFETY INFORMATION

To prevent injury to the user or other people and property damage, the following instructions must be followed. Incorrect operation due to ignoring of instructions may cause harm or damage.

The safety precautions listed are divided into two categories. In either case, important safety information is listed which must be read.

WARNING

Failure to observe a warning may result in death. The appliance shall be installed in accordance with national wiring regulations.

CAUTION

Failure to observe a caution may result in injury or damage to the equipment.

WARNING

Ask your dealer for installation of the air conditioner. Incomplete installation performed by yourself may result in a water leakage, electric shock, and fire.

Ask your dealer for improvement, repair, and maintenance. Incomplete improvement, repair, and maintenance may result in a water leakage, electric shock, and fire.

In order to avoid electric shock, fire or injury, or if you detect any abnormality such as smell of fire, turn off the power supply and call your dealer for instructions.

Never let the indoor unit or the remote controller get wet. It may cause an electric shock or a fire.

Never press the button of the remote controller with a hard, pointed object. The remote controller may be damaged.

Never replace a fuse with that of wrong rated current or other wires when a fuse blows out. Use of wire or copper wire may cause the unit to break down or cause a fire.

It is not good for your health to expose your body to the air flow for a long time.

Do not insert fingers, rods or other objects into the air inlet or outlet.

When the fan is rotating at high speed, it will cause injury.

Never use a flammable spray such as hair spray, lacquer or paint near the unit. It may cause a fire.

Never touch the air outlet or the horizontal blades while the swing flap is in operation. Fingers may become caught or the unit may break down.

Never put any objects into the air inlet or outlet. Objects touching the fan at high speed can be dangerous.

Never inspect or service the unit by yourself. Ask a qualified service person to perform this work.

Do not dispose this product as unsorted municipal waste. Collection of such waste separately for special treatment is necessary.

Do not dispose of electrical appliances as unsorted municipal waste. Use separate collection facilities. Contact your local government for information regarding the connection systems available.

If electrical appliances are disposed of in landfills or dumps, hazardous substances can leak into the groundwater and get into the food chain, damaging your health and well-being.

To prevent refrigerant leak, contact your dealer. When the system is installed and runs in a small room, it is required to keep the concentration of the refrigerant, if by any chance coming out, below the limit. Otherwise, oxygen in the room may be affected, resulting in a serious accident.

The refrigerant in the air conditioner is safe and normally does not leak. If the refrigerant leaks in the room, contact with a fire of a burner, a heater or a cooler may result in a harmful gas.

Turn off any combustible heating devices, ventilate the room, and contact the dealer where you purchased the unit. Do not use the air conditioner until a service person confirms that the portion where the refrigerant leaks is repaired.

Do not allow a child to mount on the outdoor unit or avoid placing any object on it. Falling or tumbling may result in injury.

Do not operate the air conditioner when using a room fumigation - type insecticide. Failure to observe could cause the chemicals to become deposited in the unit, which could endanger the health of those who are hypersensitive to chemicals.

Do not place appliances which produce open fire in places exposed to the air flow from the unit or under the indoor unit. It may cause incomplete combustion or deformation of the unit due to the heat.

Do not install the air conditioner at any place where flammable gas may leak out. If the gas leaks out and stays around the air conditioner, a fire may break out.

The appliance is not intended for use by young children or infirm persons without supervision.

This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children shall not play with the appliance. Cleaning and user maintenance shall not be made by children without supervision.

This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

Children should be supervised to ensure that they do not play with the appliance.

Do not operate the air conditioner with a wet hand. An electric shock may happen.

Do not touch the heat exchanger fins. These fins are sharp and could result in cutting injuries.

Do not place items which might be damaged by moisture under the indoor unit. Condensation may form if the humidity is above 80%, the drain outlet is blocked or the filter is polluted.

After a long use, check the unit stand and fitting for damage. If damaged, the unit may fall and result in injury.

To avoid oxygen deficiency, ventilate the room sufficiently if equipment with burner is used together with the air conditioner.

Arrange the drain hose to ensure smooth drainage. Incomplete drainage may cause wetting of the building, furniture etc.

Never touch the internal parts of the controller. Do not remove the front panel. Some parts inside are dangerous to touch, and a machine trouble may happen.

Never expose little children, plants or animals directly to the air flow. Adverse influence to little children, animals and plants may result.

Do not allow a child to mount on the outdoor unit or avoid placing any object on it. Falling or tumbling may result in injury.

Do not operate the air conditioner when using a room fumigation - type insecticide. Failure to observe could cause the chemicals to become deposited in the unit, which could endanger the health of those who are hypersensitive to chemicals.

Do not place appliances which produce open fire in places exposed to the air flow from the unit or under the indoor unit. It may cause incomplete combustion or deformation of the unit due to the heat.

Do not install the air conditioner at any place where flammable gas may leak out. If the gas leaks out and stays around the air conditioner, a fire may break out.

The appliance is not intended for use by young children or infirm persons without supervision.

This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children shall not play with the appliance. Cleaning and user maintenance shall not be made by children without supervision.

This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

Children should be supervised to ensure that they do not play with the appliance.









If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.

Do not operate your air conditioner in a wet room such as a bathroom or laundry room.

2. TEMPORARY OPERATIONS

The air conditioner consists of the indoor unit, the outdoor unit, the connecting pipe and the remote controller. (See Fig 1)

Function indicators on indoor unit display panel

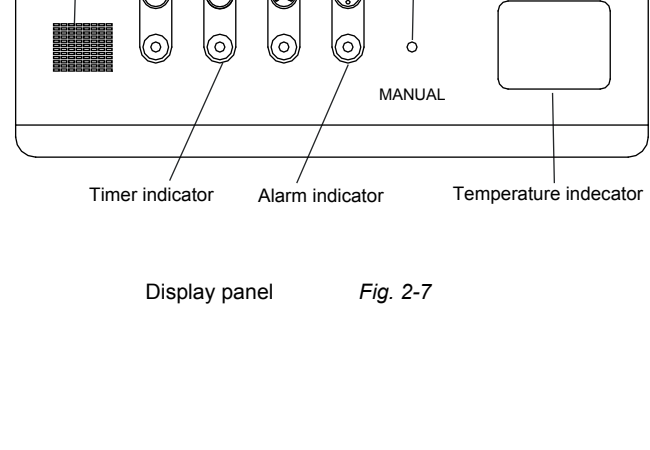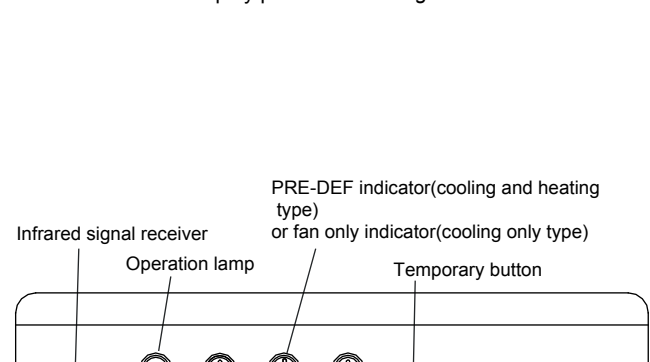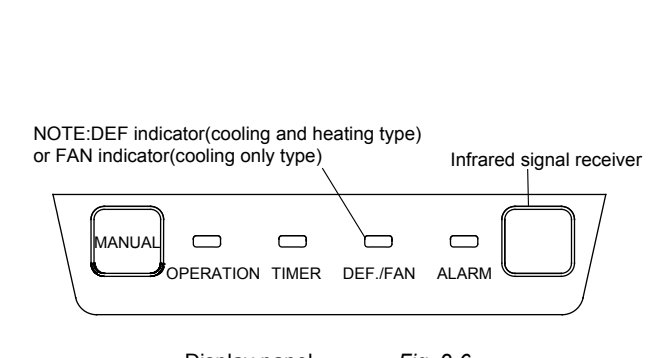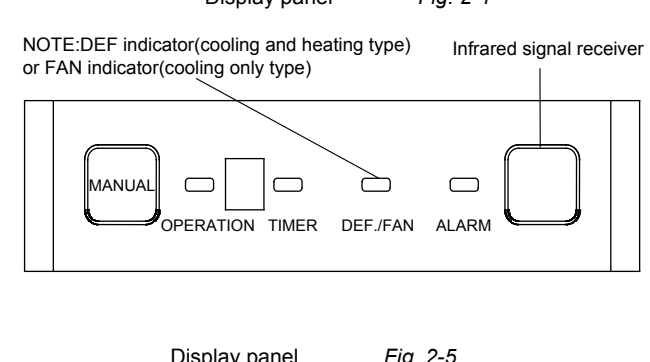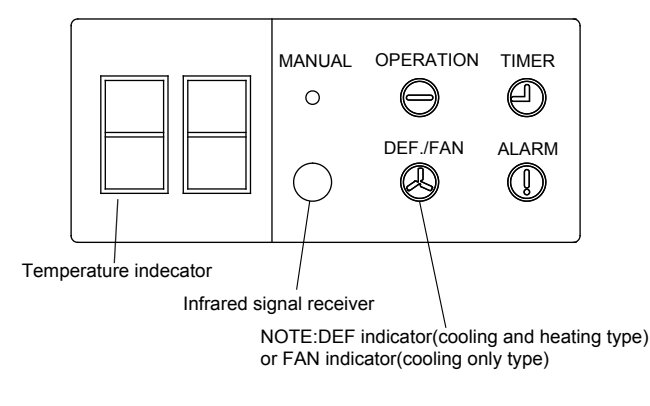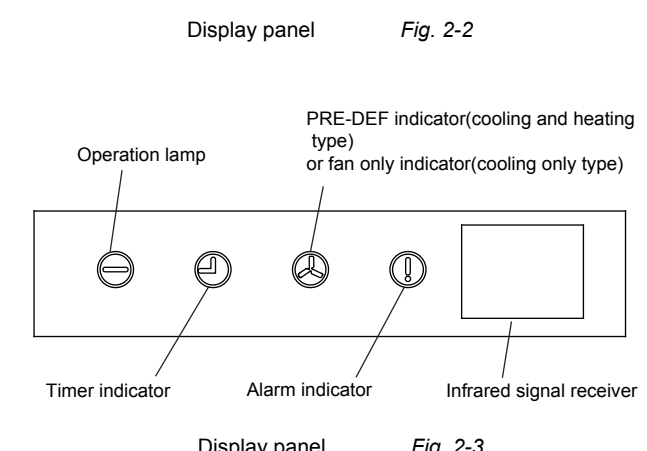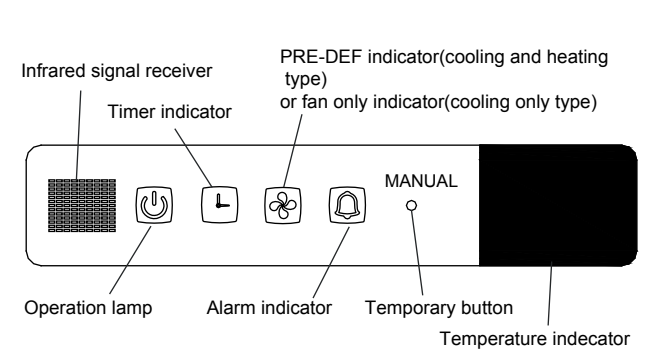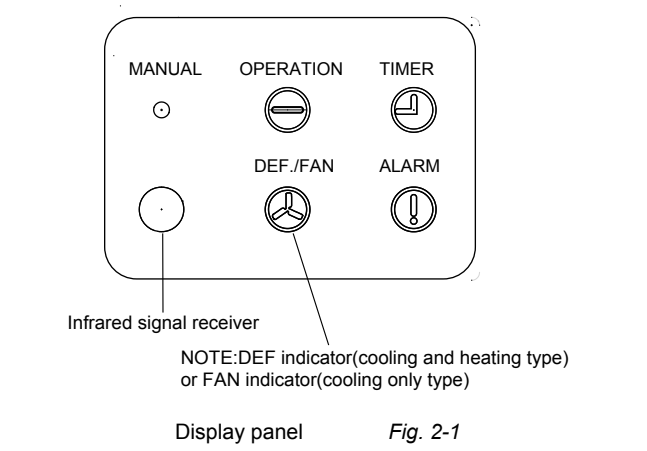

For inverter type, this switch is used for after-sales service purpose only. The user should not push it.

For fixed-frequency type, this function is used to operate the unit temporarily in case you misplace the remote controller or its batteries are exhausted. Two modes including FORCED AUTO and FORCED COOL can be selected through the TEMPORARY BUTTON on the air-in grill control box of the indoor unit. Once you push this button, the air conditioner will run in such order: FORCED AUTO, FORCED COOL, OFF, and back to FORCED AUTO.

1. FORCED AUTO
The OPERATION lamp is lit, and the air conditioner will run under FORCED AUTO mode. The remote controller operation is enabled to operate according to the received signal.

2. FORCED COOL
The OPERATION lamp flashes, the air conditioner will turn to FORCED AUTO after it is enforced to cool with a wind speed of HIGH for 30 minutes. The remote controller operation is disabled.

3. OFF
The OPERATION lamp goes off. The air conditioner is OFF while the remote controller operation is enabled.

NOTE

This manual does not include Remote Controller Operations. See the <Remote Controller Owner's manual> packed with the unit for details.

3. AIR CONDITIONER OPERATIONS AND PERFORMANCE

Use the system in the following temperature for safe and effective operation. The Max operation temperature for the air conditioner (Cooling/Heating)

Mode	Temperature	Outdoor temperature	Room temperature
Cooling operation	18°C ~ 43°C (64°F ~ 109°F)	17°C ~ 32°C (62°F ~ 90°F)	17°C ~ 32°C (62°F ~ 90°F)
Heating operation (cooling only type without)	18°C ~ 43°C (64°F ~ 109°F)	17°C ~ 32°C (62°F ~ 90°F)	17°C ~ 32°C (62°F ~ 90°F)
Drying operation	18°C ~ 43°C (64°F ~ 109°F)	17°C ~ 32°C (62°F ~ 90°F)	17°C ~ 32°C (62°F ~ 90°F)

Table 3-1 (for inverter type air conditioner)

Mode	Temperature	Outdoor temperature	Room temperature
Cooling operation	18°C ~ 43°C (64°F ~ 109°F)	17°C ~ 32°C (62°F ~ 90°F)	17°C ~ 32°C (62°F ~ 90°F)
Heating operation (cooling only type without)	18°C ~ 43°C (64°F ~ 109°F)	17°C ~ 32°C (62°F ~ 90°F)	17°C ~ 32°C (62°F ~ 90°F)
Drying operation	18°C ~ 43°C (64°F ~ 109°F)	17°C ~ 32°C (62°F ~ 90°F)	17°C ~ 32°C (62°F ~ 90°F)

NOTE

- 1 If an air conditioner is used outside the above conditions, it may cause the unit to function abnormally.
- 2 The phenomenon is normal that the surface of air conditioning may condense water when the relative larger humidity in room, please close the door and window.
- 3 Optimum performance will be achieved within these operating temperature range.

Three-minute protection feature

A protection feature prevents the air conditioner from being activated for approximately 3 minutes when it restarts immediately after operation.

Power failure

Power failure during operation will stop the unit completely.

The OPERATION lamp on the indoor unit will start flashing when power is restored.

To restart operation, push the ON/OFF button on the remote controller.

Lighting or a car wireless telephone operating nearby may cause the unit to malfunction.

Disconnect the unit with the power and then connect the unit with the power again. Push the ON/OFF button on the remote controller to restart operation.

Refrigerant Leakage Detection (optional):

With this new technology, the display area will appear "EC" (if applicable), and the LED indication lamps continue flashing when the outdoor unit detects refrigerant leakage.

Lower Angle Memory Function (optional):

For some models, the machine is special designed with lower angle memory function. Power failure during operation or pressing the ON/OFF button on the remote controller will stop the unit completely. When the power restores or pressing the ON/OFF button on the remote controller again, the unit restarts automatically with the previous open angle of the horizontal louver by the memory function. So we strongly recommend that the open angle of the horizontal louver should not be set too small in case the condensed water forms and drops from the horizontal louver. Press the Manual control button and the open angle of the horizontal louver will be restored to the standard angle.

4. HINTS FOR ECONOMICAL OPERATION

The following should be noticed to ensure an economical operation. (Refer to corresponding chapter for details)

Adjust the air flow direction properly to avoid winding toward your body.

Adjust the room temperature properly to get a comfortable situation and to avoid supercooling and superheat.

In cooling, close the curtains to avoid direct sunlight.

To keep cool or warm air in the room, never open doors or windows more often necessary.

Set the timer for the desired operation time.

Never put obstructions near the air outlet or the air inlet. Or it will cause lower efficiency, even a sudden stop.

If you don't plan to use the unit for a long time, please disconnect power and remove the batteries from the remote controller. When the power switch is connected, some energy will be consumed, even if the air conditioner is in operation. So please disconnect the power to save energy. And please switch the power on 12 hours before you restart the unit to ensure a smooth operation.

A clogged air filter will reduce cooling or heating efficiency, please clean it once two weeks.

5. ADJUSTING AIR FLOW DIRECTION

5.1 Adjust the horizontal louver

Auto-swing
Press SWING V button, the louver will swing up and down automatically.

Manual Swing
Adjust the louver to achieve better cooling/heating effects when cooling/heating.

When cooling
Adjust the louver horizontally.

When heating
Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

Adjust the louver downwards (vertically).

QSDLU-002AEN

The design and specifications are subject to change without prior notice for product improvement. Consult with the sales agency or manufacturer for details.

202000192523

20130925